

NEW · DIGITAL

DVB-S2 RECEIVER S2 6000 HD 2in1 SENIOR



Comes with large simplified
REMOTE CONTROL FOR SENIORS

- 4 PROGRAMMABLE
BUTTONS FOR TV SET



RCU learns the functions of another remote control (TV set, Air conditioner, Garage door, etc)



PRODUCT SPECIFICATIONS

Main features:

DVB-S/S2 High Definition (HD) and Standard Definition (SD) Free to Air TV program reception

Fully complies with DVB-S/S2 HD H.264 AVC and MPEG-2 Standards

Memory capacity up to 5000 channels

Preprogrammed Favorite TV program lists

Automatic and Manual Channel Scan function; Preprogrammed Satellites with Transponder lists

Electronic Program Guide, Parent Control, Subtitles and Multilingual audio

High Definition 1080p video output on HDMI connector; SCART connector for legacy TV sets

HD Personal Video Recording (PVR) with Timer function, Media (Movie, Music, Photo) playback via USB using external USB memory devices (not included)

Dolby Digital and Dolby Digital Plus support for best Digital Audio experience

Easy installation – Plug and Play

DIMENSIONS:

Unit size: 150 x 98 x 36mm, unit weight 165g

Gift box size: 194 x 177 x 60mm. Weight 480g

Carton box: 20 units, 406 x 317x 376mm

EAN Code: 4779049800181

Content of the gift box package:

Tuner unit with Power adapter;

Remote control Unit: Senior Remote Control Unit;

4XAAA batteries; User Manual


Certifications: CE, RoHS

www.newdigital.tv

CONNECTORS:


FRONT PANEL

Controls STBY, Channel+; Channel- ; Green/Red LED;
USB 2.0; LED Display

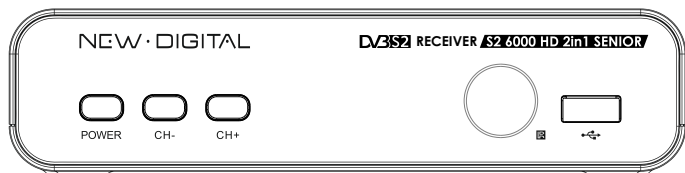

REAR PANEL

LNB (SAT) Input: F type female; LNB OUT F type female; SCART; HDMI; digital Audio on Optical SPDIF; 12V power supply connector.

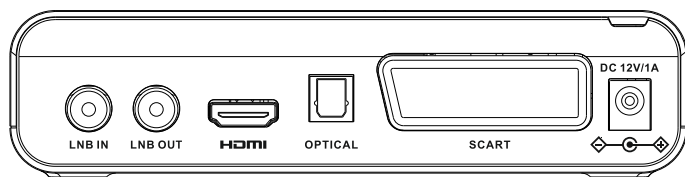

MAIN TECHNICAL SPECIFICATIONS:

RF input with support of:

DiSEqC 1.0, 1.1, 1.2, USALS, SCR (Unicable I), Tone
LNB Control Voltages:
- Vertical: +13.5V (+14.5V at high voltage)
- Horizontal: +18V (+18.9V at high voltage); 13/18V DC control for V or H polarities 22kHz LNB tone control

Tuner/Demodulator:

Type DVB-S & S2
Frequency Range 950~2150MHz
RF Input Level -70~-25dBm
Symbol Rate:
- DVB-S: 2 - 45Ms/s (QPSK)
- DVB-S2: 3~42Ms/s(QPSK), 3 - 30Ms/s(8PSK)
Demodulation DVB-S Mode QPSK
DVB-S2 Mode 8PSK
Programmable Code Rate,
- DVB-S: Auto, Viterbi 1/2, 2/3, 3/4, 5/6, 7/8
- DVB-S2: Auto, 1/2, 3/5, 2/3, 3/4, 4/5, 5/6, 8/9, 9/10(QPSK)
- Auto, 3/5, 2/3, 3/4, 5/6, 8/9, 9/10(8PSK)

Video and Audio performance:

Supported SD and HD Video formats:
MPEG1/MPEG2 MP@HL/H.264 HP@L4.0.
Video resolution: 576i, 576p, 720p, 1080i, 1080p.
Audio formats:
MPEG1 LAYER 1&2, EAC3 with downmix to Stereo.
System:
CPU ALI M3510 G
Flash Memory 8 MB
SDRAM 128MB integrated
PVR and Media player part:
File system: - FAT12/FAT16/FAT32

File extensions supported *.ts /*.tp/*trp
Video codec supported:MPEG1/MPEG2 MP@HL/H.264 HP@L4.0/
Maximal video resolution:1920x1080x30 FPS
Audio codec supported:MPEG layer 1/2, AAC, Dolby D/Dolby D+ (License)

Supported Media file formats:

Video files: avi; mkv
Photo: Jpeg; png
Music: mp3

Power:

220V-240V AC, 50-60 Hz, External power Adapter 220V AC/12VDC
Tuner Input Voltage DC 12V/1.0A
Power Consumption Max. 12W (Operating),
Max.1W(Standby)